


StoneCore HYBRID FLOORING

StoneCore
Hybrid By Elite Wooden floors

BOARD SIZE: 1545mm x 228mm x 9mm PACK SIZE: 1.761M2

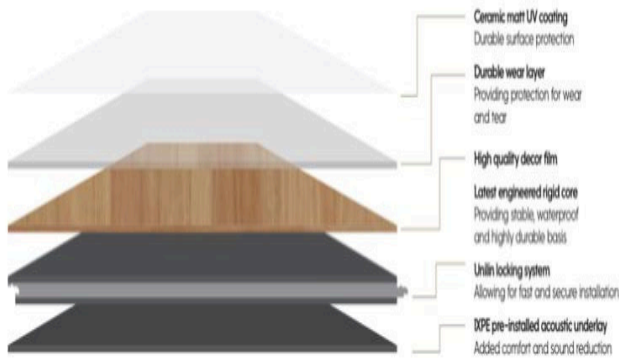

0.5mm Commercial Grade Ceramic Coating	Unilin Click system
AC4 Wear rating	Domestic Pet Suitable
+ION +ION antimicrobial technology	No acclimatization necessary
100% Water Proof	Formaldehyde Free
5 Star Acoustic Rating*	



NSW Spotted Gum



Native Blackbutt



Blonde Oak



Pale Oak



Dove Grey



Majestic



Native Spotted Gum

Technical specifications

Attributes	Standard	Result
Type of floor covering		Hybrid / Rigid core
Installation		Unilin Click System
Core		SPC
Colours		7
Size		1545mm x 228mm
Thickness		9.0mm
Core thickness		7.0mm
Wear layer		0.5mm
Surface Features		Embossed
Backing		2mm Acoustic underlay
Packaging		5 Planks / pack = 1.761m ²
Total weight		11.5kg/m ² / 23kg per pack
Beveled edge		Micro Bevel Edges
Classification	ISO 10874 / EN 685 ISO 10874 / EN 685	Commercial: light Domestic: heavy
Reaction to fire	AS/NZ ISO9239 1-2003	CHF: ≥10.05kW/m ² Smoke value: 132%.min P3
Slip resistance	AS 4586:2013 Appendix A	Length: -0.9%
Dimensional stability	Heat at 60°C for 24 hours	Width: -0.09%
Acoustic impact noise reduction	AS/NZ ISO 717.2-2004	FIIC4,5 = 61 L'nTw3 = 41 AAAC 5 Star Rating ¹
Underfloor heating		Suitable for hydronic underfloor heating, max. 27°C Compliant for VOC
VOC Emissions	ASTM D5116-17 Green Building Council of Australia Phthalate Free	Yes Not detected
Quartz content (wt%)		10 Years warranty*
Warranty	Commercial Domestic	25 Years warranty*